

Escaid™ PathFrac™ fluids

ExxonMobil

Taking unconventional extraction further

Energy lives here™



Achieve results in the toughest operations

Hydraulic fracturing requires fluids that perform effectively under stringent down-hole conditions. The composition of fracturing fluids can vary widely depending on geology. The vast majority of wells are fractured with water-based fluids, composed of over 99.5% water and proppant (often sand or ceramic beads) and less than 0.5% additives.

The additives, while present in very low concentration, provide vital performance enhancements.

Purified by an advanced hydrogenation process, **Escaid™ PathFrac™ fluid** effectively facilitates the delivery of key additives which drive the performance of fracturing fluid formulations.

Formulate fracturing fluids that are reliable and environmentally responsible

Escaid PathFrac fluid enables reliable hydraulic fracturing operations in multiple applications:

- Often used as a carrier fluid for guar slurry viscosifier formulations, or as a carrier fluid for polyacrylamide friction reducers.
- Well suited for use as a carrier fluid for crosslinkers and gel breakers.
- For geologies such as limestone that are not suitable for fracturing with water-based fluids, Escaid PathFrac can also be used as a barrier fluid in emulsified acid fracturing formulations.
- In formations that can be sensitive to water (clay), Escaid PathFrac can be directly used as a replacement for diesel in oil-based fracturing fluid formulations.

With vapor pressures lower than those of traditional diesel products, Escaid PathFrac fluid can help you optimize your formulations with:

- Lower volatility, higher flash point, and improved safety in high temperature conditions.
- Lower potential for exposure by inhalation versus diesel.

In addition, Escaid PathFrac fluid provides:

- Very low total typical aromatic contents < 0.02 wt%.⁰
- Non-detectable levels of benzene, toluene, ethyl benzene and xylenes (BTEX).^{1,2,3}
- Polycyclic aromatic hydrocarbon (PAH) level < 0.001 wt%.⁴

Escaid PathFrac fluid enhances the properties of fracturing fluids while supporting your commitment to protect the environment and the health of workers.

For applications requiring a higher density fluid to improve stability of formulations, **Escaid PathFrac HV fluid** has been designed for our customers to meet this specific need. With a typical viscosity of about 2.6 cSt at 40°C, it can provide additional stability for holding guar in suspensions. It has a typical pour point of -20°C, and a minimum flash point specification of 101°C. It also exhibits similar safety, health and environment properties compared to Escaid PathFrac.

Both Escaid PathFrac fluids exhibit virtually zero BTEX and reduce health risks

| BTEX ¹ mg/kg | Escaid PathFrac and Escaid PathFrac HV | Diesel | |
|-------------------------|--|---------------------|---------------------------|
| Reference | GC/MS ² and US EPA 8260B ³ | EPA ^{5, 6} | US EPA 8260B ⁷ |
| Benzene | ND | 26-1000 | 43 |
| Toluene | ND | 69-7000 | 980 |
| Ethylbenzene | ND | 70-2000 | 890 |
| Meta-plus para-Xylene | ND | | 2300 |
| Ortho-Xylene | ND | | 1200 |
| Total Xylenes | | 190-6000 | 3500 |
| Total BTEX | | 355-16000 | 5413 |

Notes

⁰ Does not apply to Escaid PathFrac HV

¹ As manufactured, Escaid PathFrac and PathFrac HV have non-detectable (ND) levels of each of the BTEX species, as analyzed by GC/MS

² Practical quantitation limits: Benzene = 0.2 mg/kg, Toluene = 0.3 mg/kg, Ethylbenzene = 0.1 mg/kg, o-Xylene = 0.1 mg/kg, m-xylene plus p-xylene = 0.1 mg/kg; test method Baytown Refinery Laboratory, Analysis AROM_MS_L


³ Spot analysis, sample reporting limits: Benzene = 0.05 mg/kg, Toluene = 0.1 mg/kg, Ethylbenzene = 0.05 mg/kg, o-Xylene = 0.1 mg/kg, m-xylene plus p-xylene = 0.15 mg/kg; test method US EPA 8260B

⁴ Spot analysis, TSR15-014, PAH content by EPA 1654A

⁵ Evaluation of Impacts to Underground Sources of Drinking Water by Hydraulic Fracturing of Coalbed Methane Reservoirs; National Study Final, EPA study 816-R-04-003, Chapter 4, Table 4.2 Report

⁶ Potter, T.L. and Simmons, K.E., 1998. Total Petroleum Hydrocarbon Criteria Working Group Series, Volume 2. Composition of Petroleum Mixtures. The Association for Environmental Health and Science

⁷ Spot analysis, TSR10-043, test method US EPA 8260B

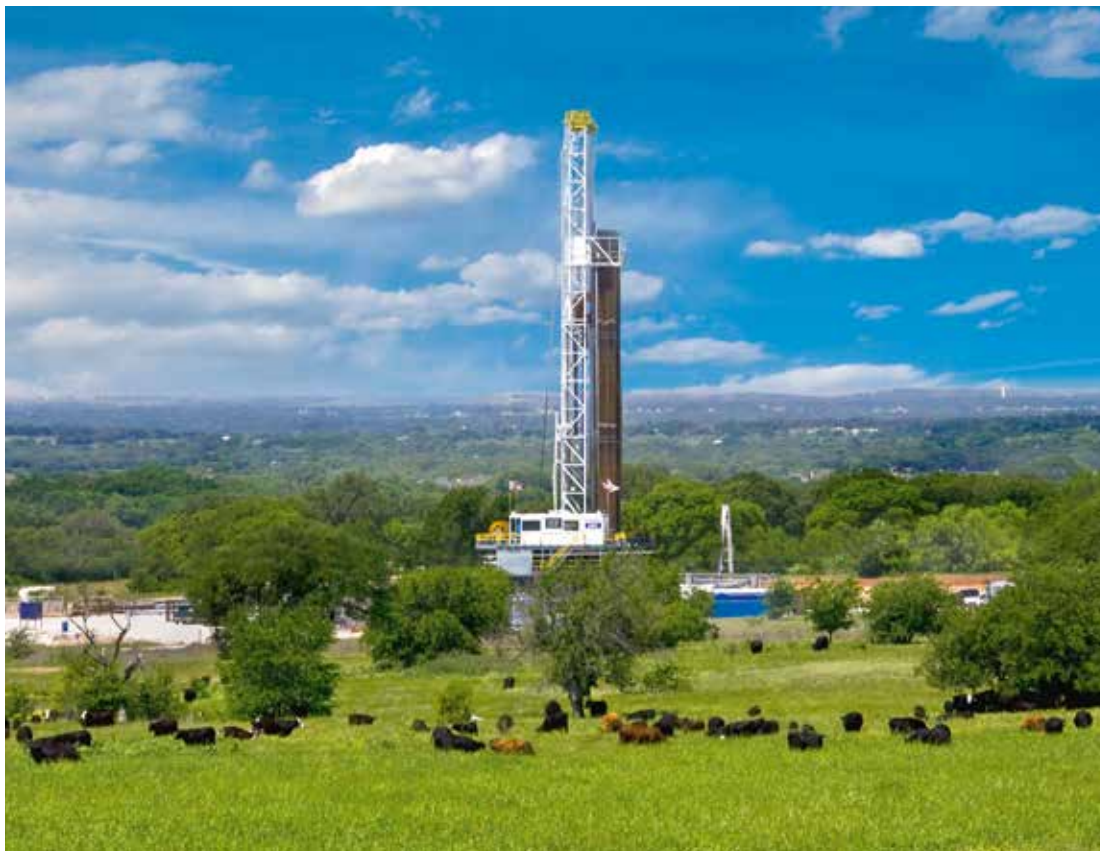

Performance you need and nothing you don't

Both Escaid PathFrac fluids offer:

Potential for high efficiency with a smaller environmental footprint versus traditional diesel

- Low environmental toxicity
- Very low acute toxicity effects on marine or fresh water species
- Readily biodegradable (per OECD 301F test methodology)
- No environmental hazard classification under EU CLP[®] regulation and under GHS⁹

Potential for improved safety and health versus traditional diesel

- Lower risk of worker exposure to vapors
- Lower skin irritation
- Lower flammability risk due to higher flash points
- Low sub-chronic toxicity; non-mutagenic
- Not classified by US Department of Transportation

Potential benefits for operations in cold weather conditions

- Low typical pour points (-39°C and -20°C respectively for Escaid PathFrac and Escaid PathFrac HV)

Key sales specifications

| Properties | Escaid PathFrac | Escaid PathFrac HV | Test Method |
|-------------------------|-------------------------------|--------------------|-----------------|
| Aromatic Content | 0.02 wt% max. | 0.50 wt% max. | AMS 140.31 |
| Flash Point | 70°C min. | 101°C min. | ASTM D93 |
| Pour Point | -35°C max. | Reported on CoA | ASTM D97 |
| Viscosity at 40C | 1.50 cSt min. - 1.75 cSt max. | Reported on CoA | ASTM D445 |
| Distillation | | | ASTM D86 |
| Distillation Temp., IBP | 192°C min. | 230°C min. | |
| Distillation Temp., DP | 250°C max. | 277°C max. | |

Please contact your sales representative for additional product property information

Notes

[®]CLP: Classification, Labeling and Packaging regulations of the European Union

⁹GHS: United Nations Globally Harmonized System of Classification and Labelling of Chemicals



Contact us for more information:

exxonmobilchemical.com

F0216-022E49

©2016 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Chemical" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.